



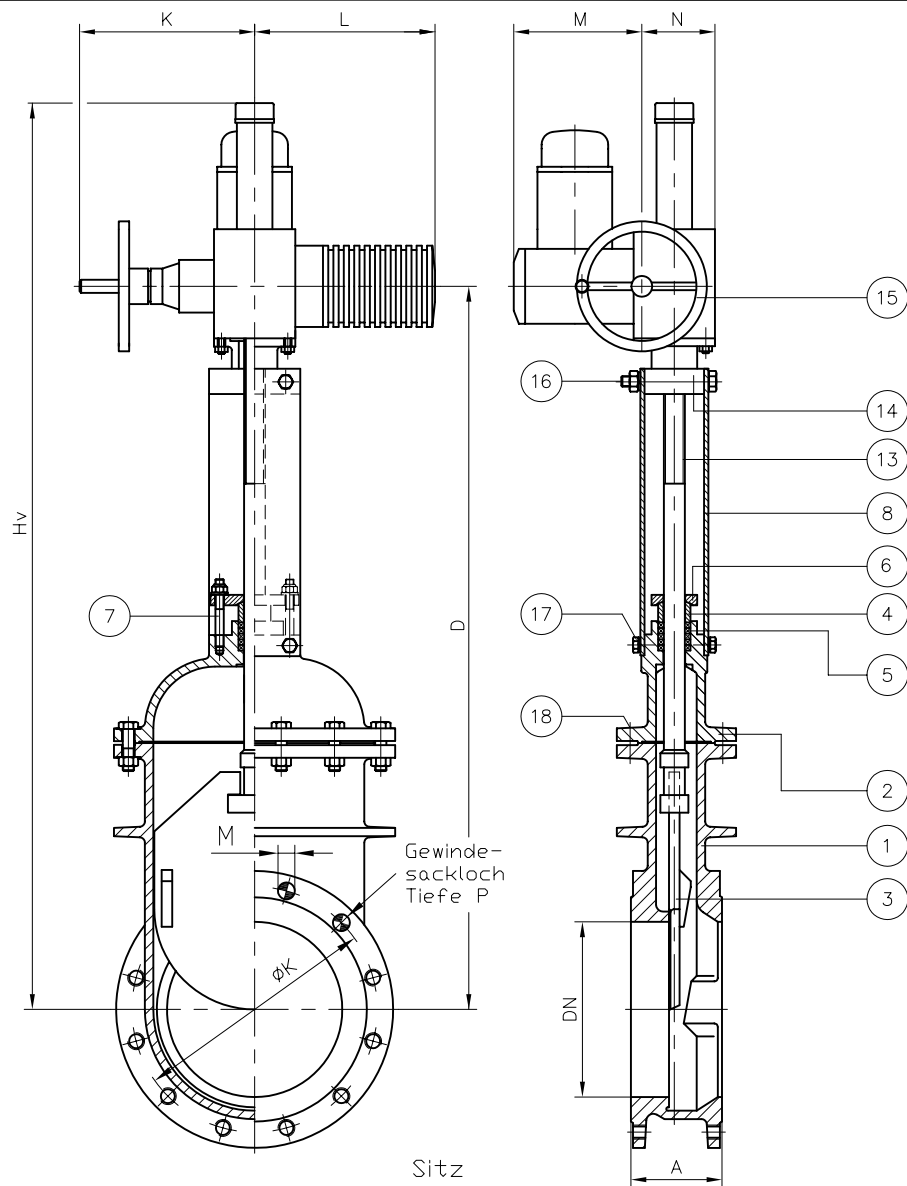

Sitz

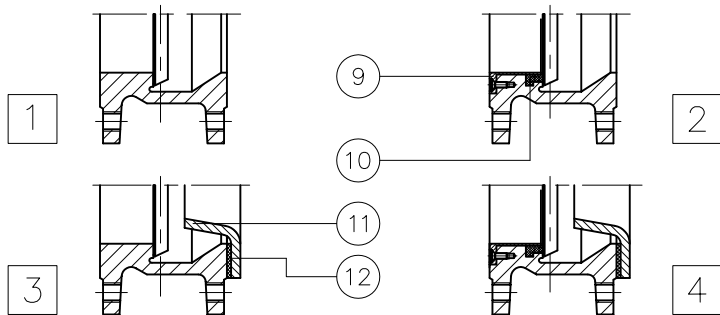

POS.	Benennung	Material		
		CD 4463 E	CD 4466 E	CD 6666 E
1	Gehäuse	GS-C 25	GS-C 25	1.4408
2	Bonnet	GS-C 25	GS-C 25	1.4408
3	Schieberblatt	1.4301	1.4401	1.4401
4	Stopfbuchse	1.4301	1.4401	1.4401
5	Packung	PTFE/Synthetik	PTFE/Synthetik	PTFE/Synthetik
6	Stopfbuchsbrille	Stahl	Stahl	1.4401
7	Schraube	Stahl verzinkt	Stahl verzinkt	1.4401
8	Halteplatte	Stahl	Stahl	Stahl
9	Haltering	1.4301	1.4401	1.4401
10	Sitzring	EPDM	EPDM	EPDM
11	Ablenkkonus	1.4006	1.4006	1.4006/1.4408
12	Dichtung	—	—	—
13	Spindel	1.4305	1.4305	1.4401
14	Aufbauflansch	Stahl	Stahl	Stahl
15	Elektro - Antrieb	—	—	—
16	Schraube, Mutter, Scheibe	Stahl	Stahl	Stahl
17	Schraube, Scheibe	Stahl	Stahl	Edelstahl
18	Schraube, Mutter, Scheibe	Stahl	Stahl	Edelstahl

Verteiler 1

DN	Maße						
	A	D	K	L	M	N	Hv
50	70	435	234	265	197	102	675
80	70	507	234	265	197	102	747
100	70	562	234	265	197	102	802
125	90	634	234	265	197	102	874
150	90	704	234	265	197	102	944
200	100	894	234	265	197	102	1134
250	114	1022	234	265	197	102	1262
300	114	1148	234	265	197	102	1448
350	127	1303	256	282	197	115	1733
400	140	1479	256	282	197	115	1979
450	152	1597	325	385	222	153	2297
500	152	1730	325	385	222	153	2430
600	178	2041	325	385	222	153	2741

Flanschanschluss												
DN	DIN PN10					DIN PN16						
	+	O	M Met.	P	ØK	+	O	M Met.	P	ØK		
50	2	2	M16	12	125	2	2	M16	12	125		
80	2	6	M16	12	160	2	6	M16	12	160		
100	2	6	M16	12	180	2	6	M16	12	180		
125	4	4	M16	12	210	4	4	M16	12	210		
150	4	4	M20	12	240	4	4	M20	12	240		
200	4	4	M20	14	295	4	8	M20	12	295		
250	4	8	M20	18	350	4	8	M24	14	355		
300	4	8	M20	18	400	4	8	M24	16	410		
350	6	10	M20	20	460	6	10	M24	16	470		
400	6	10	M24	22	515	6	10	M27	20	525		
450	8	12	M24	22	565	8	12	M27	20	585		
500	8	12	M24	24	620	8	12	M30	20	650		
600	8	12	M27	25	725	8	12	M33	24	770		
DN	DIN PN25					DIN PN40						
	+	O	M Met.	P	ØK	+	O	M Met.	P	ØK		
50	2	2	M16	12	125	2	2	M16	12	125		
80	2	6	M16	12	160	2	6	M16	12	160		
100	2	6	M20	12	190	2	6	M20	12	190		
125	4	4	M24	12	220	4	4	M24	12	220		
150	4	4	M24	12	250	4	4	M24	12	250		
200	4	8	M24	12	310	4	8	M27	14	320		
250	4	8	M27	14	370	4	8	M30	18	385		
300	6	10	M27	16	430	6	10	M30	18	450		
350	6	10	M30	16	490	6	10	M33	20	510		
400	6	10	M33	20	550	6	10	36	22	585		
450	8	12	M33	20	600	—	—	—	—	—		
500	8	12	M33	20	660	8	12	M39	24	670		
600	8	12	M36	24	770	—	—	—	—	—		

GEFA PROCESSTECHNIK GMBH Germaniastraße 28 44379 Dortmund	Schutzvermerk nach DIN 34 beachten		Maßstab	
			PN 10 / PN 16 / PN 25 / PN 40	
		2004	Datum	Name
		Bearb.	29.09.	Rei
		Gepr.	29.09.	ZA
		Norm		
		Rev. gepr.	07.09.2006	
				Maßblatt Schieber Typ CD mit Elektro - Antrieb
				8969-3
				Blatt
				BL